

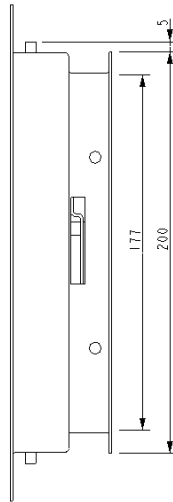


**FIRE RATED ACCESS PANEL**

**CODE GL150F**

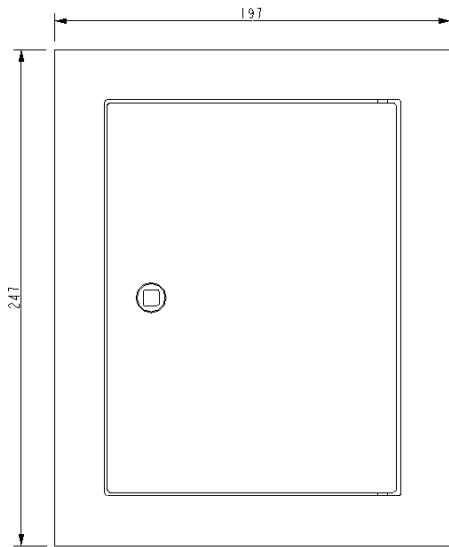

Overall Dimension – 247mm x 197mm  
Internal Opening – 177mm x 107mm

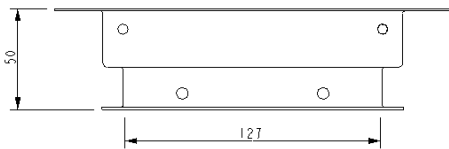

### Description:

The fire rated version of the GL100 provides protected openings in ceilings and walls for access to building engineering services such as:

- Electrical Wiring Systems
- Fuse Boxes / Switches
- Controls / Connection Links
- Valves / Stopcocks / Plumbing

The GL150F includes a 'Square Lock & Key' to restrict unwanted access and is fire rated for up to 2 hours. The door is finished in powder coated white and can be over painted to blend with the surrounding surface.

The Fire Rated Panel is a high quality robust solution suitable for everyday use with all the discrete advantages required of an access panel.

### References:

BRE	Digest 262/270
BSI	BS5250
DOE	Building regs L1
NHBC	Good Practice Guide
NHBC	Standards 7.7

PACKING DETAILS	1 Item per Box
MATERIAL	1.0mm Zintec Electro-Galvanised Mild Steel.  Finished in polyester powder coat white RAL 9010 20% Gloss.
WEIGHT	1.25kg per Panel
COLOUR	White
FIRE CERTIFICATE	Tested up to 2 hours by Chiltern International Fire (TRADA) Ltd.

MANTHORPE BUILDING PRODUCTS LTD  
MANTHORPE HOUSE  
BRITAIN DRIVE  
CODNOR GATE BUSINESS PARK  
RIPLEY  
DERBYSHIRE DE5 3ND

TEL: 01773 514 200  
FAX: 01773 514 262  
EMAIL: [sales@manthorpe.co.uk](mailto:sales@manthorpe.co.uk)  
WEB: [www.manthorpe.co.uk](http://www.manthorpe.co.uk)

DRN R.P

Date 26.11.04

DRG No

Issue

The company maintains a policy of continuous development of its product range and reserves the right to amend the specification without notice.

**MBP 8223**

**B**