


ROFYCOM GRP TRIMS

Supplied in 3 metre lengths
90 degree angles available

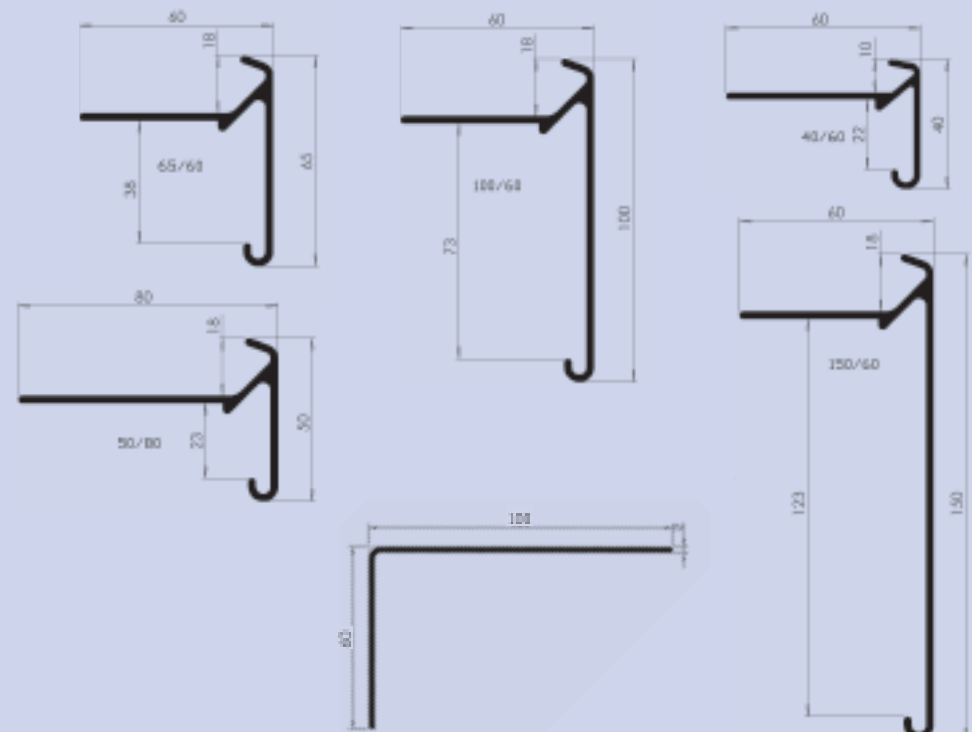


Glasstrim, V-Trim GRP, Driptrim and Rofycom are pultruded glass reinforced polyester roof edge trims, designed to provide a strong, weather-proof, decorative roof edge finish and create a waterproof bond. They can be used with felt roofing, asphalt and liquid roofing systems.

Self-coloured in white, grey and black (Rofycom and Driptrim in Black only), the trims resist corrosion and the extremes of atmospheric pollution and require the minimum of maintenance.

GRP trims should be fixed by means of Cadmium or Galvanised nails or screws at not more than 300mm centres with the ends of each length firmly secured. A minimum of 8 fixings per length is required. Priming of the fixing leg is recommended. In exposed locations face fixing of Type 6 is also recommended. For further technical details visit: www.areco.co.uk

DRIPTRIM

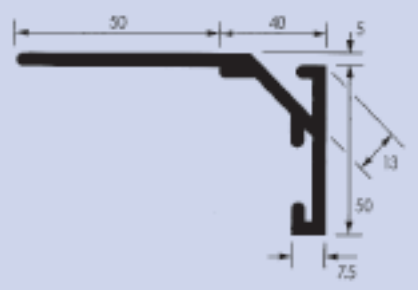


TERMINATION BARS

Available in aluminium and black GRP


Designed to provide a professional finish to upstands.

All termination bars are supplied in 2.5 metre lengths and should be bedded in mastic and screwed at no more than 300mm centres. Top edges and joints should also be finished with a suitable mastic.

ASPHALT

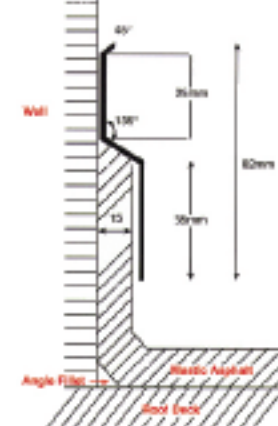

FELT

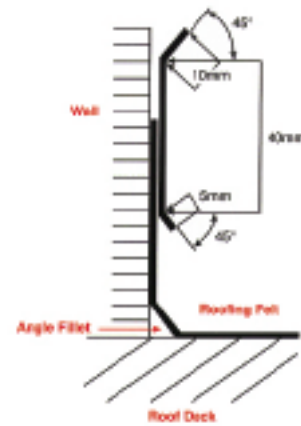

- > FULL RANGE OF SEALANTS AVAILABLE
- > HAMMER FIXINGS

- > SCREWS AND PLUGS
- > SDS DRILL BITS

AVAILABLE FROM



ROOFING ACCESSORIES



QUALITY ACCESSORIES FOR FLAT ROOFS

- > Nutrim aluminium roof edge trims
- > Glasstrim GRP roof edge trims
- > V-trim GRP roof edge trims
- > Termination bars
- > Roof outlets
- > Breather vents
- > Paving supports
- > Bespoke Metal Fabrications


Approved distributors of
XTRALITE Rooflights




Contact us to find out more

GLASSTRIM GRP ROOF EDGE TRIM

FELT SECTIONS

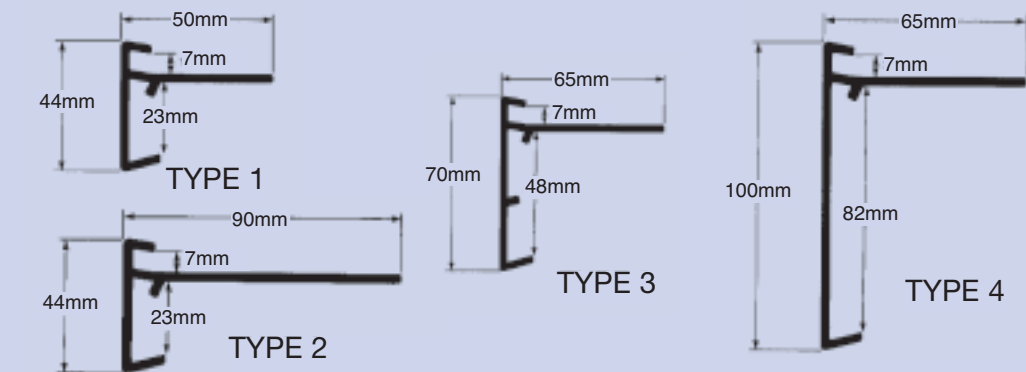


V-TRIM ASPHALT SECTIONS

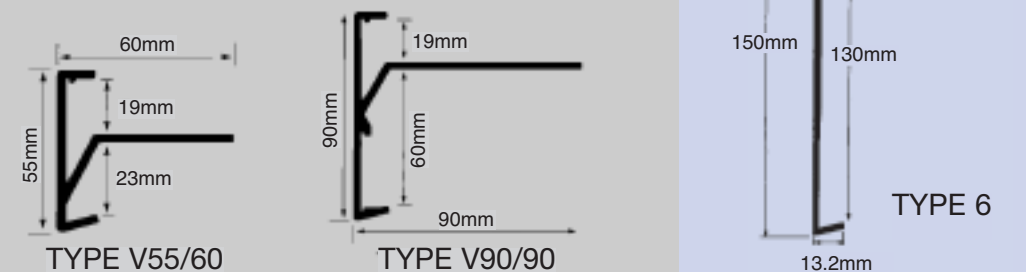

SOLCAP

- > Easily converts felt trim to liquid trim
- > Simply snaps in to place
- > Eliminates the need for mastic pointing
- > Made from UV stable durable PVC
- > Co-extruded gasket for perfect seal

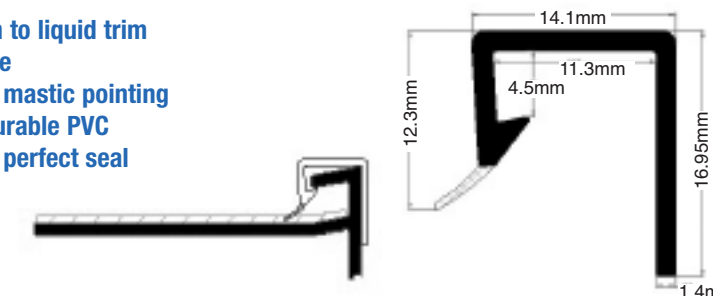

BREATHER VENTS


A range designed to extract moisture retention from flat roofs

EXTRA AQUA VENT

Manufactured in polypropylene, the base being finished in grey, the dome cover in white. Dome fixed to base with screw into self locking brass insert.

Dimensions:
Height 197mm
Diameter of base 267mm
Diameter of aperture at base 184mm

Each Extra Aqua Vent can ventilate an area of up to 36 sq. mtrs.

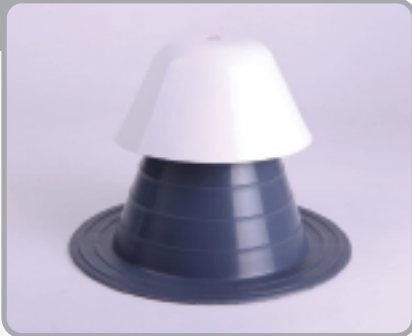

ALUMINIUM A. VENT

Manufactured from spun aluminium. Top fixed to base with self tapping screw.

Dimensions:
Height 180mm
Diameter of base 240mm
Diameter of aperture 165mm

Each Aluminium A. Vent can ventilate an area of up to 25 sq. mtrs.



ALUMINIUM MEGA-VENT

Manufactured from spun aluminium. Top fixed to base with self tapping screw.

Dimensions:
Height 350mm
Diameter of base 240mm
Diameter of aperture at base 165mm

The area that can be effectively ventilated by a "Mega-Vent" is determined by the materials used in the construction of the roof.



ROOF DRAIN RANGE

A versatile range of flat roof drainage products manufactured in EPDM. Suitable for most flat roof applications, particularly built-up felt and mastic asphalt.

UNIVERSAL ROOF DRAIN

- > Available in 60mm, 75mm, 80mm, 100mm
- > 110mm and 75mm
Also available in PVC
- > Flat roof outlet with ribbed seal to pipework
Suitable for roofs and wide gutters
- > Takes leaf guard or gravel grate and fixing ring



SUMP ROOF DRAIN

- > Available in 75mm, 100mm
- > Same as universal drain but sump gives a higher rainwater capacity
- > Use gravel grate and mounting ring



SUREFIX REFURB OUTLET

- > Available in 75mm, 80mm, 100mm
- > A robust refurb drain that uses a metal clamp ring to give a water-tight seal
- > Complete with grate which clips to clamp



PARAPET OUTLETS

- > 100mm x 100mm, 100mm x 65mm
100 x 100 x 45 degree
- > Used on through wall applications
- > Range includes adaptors and leaf guards



PIPE COLLARS

- > 34mm – 90mm, 80mm – 125mm
- > Designed to create a seal where pipes pass through roof
- > Jubilee clips available



PAVING SUPPORTS

- > 20mm pad to support roof paving
- > Can be stacked for larger gaps
- > 3mm spacing shim available
- > 15mm pad to support roof paving



NEW ADJUSTABLE PAVING SUPPORTS


- > NM1 Paving Support 25-40mm
- > NM2 Paving Support 40-70mm
- > NM3 Paving Support 60-100mm
- > NM4 Paving Support 90 – 160mm
- > NM5 Paving Support 150-270mm
- > PR1 Universal Extension (can be used in multiples up to 500mm)
- > Adjustable Paving Support Key




NUTRIM ALUMINIUM ROOF EDGE TRIM

- > Precision extruded aluminium alloy trims for Felt & Asphalt roofs.
- > Supplied in 2.5mtr lengths with Internal and External Angles available.
- > Can be Polyester Powder Coated to any RAL colour.
- > Fix with corrosion resistant screws or nails at 300mm centres.

FELT SECTIONS

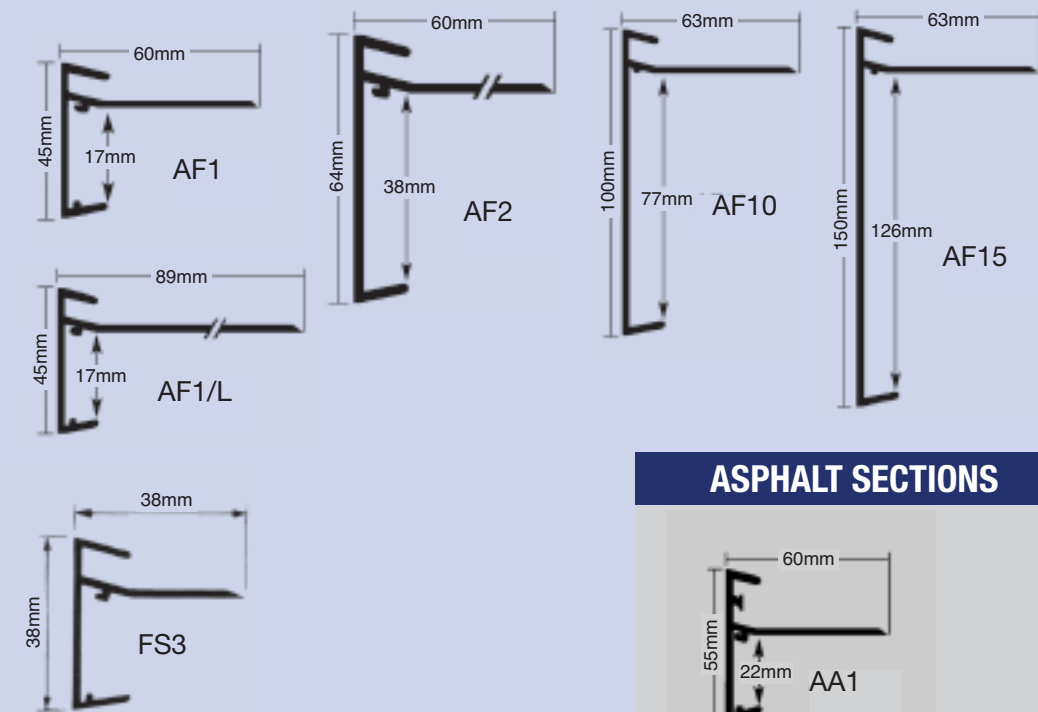

ASPHALT SECTIONS



BESPOKE METAL FABRICATIONS

- > Coping Systems - Top Fix or Secret Fix
- > Box Gutters
- > Flashings & Cills
- > Louvres

All fabricated to your requirements, call or email our Sales Team with your enquiry sales@areco.co.uk

