

## Dry Ridge Tile

CODE GDR-T / -INC.SC

### Product Preparation

#### Important:

Before installation of the GDR-T Dry Ridge Tile ensure that each tile is a fully assembled unit with 2 sets of overlapping comb skirts. Fig.1 shows an exploded view of the whole assembly.

With the top batten secured, place the first plastic ridge tile flush with the end of the verge and secure with the screws provided (See Fig.2). Repeat this process along the length of the ridge, ensuring all tiles are locked together and finish the ends with a Manthorpe Ridge End Cap.

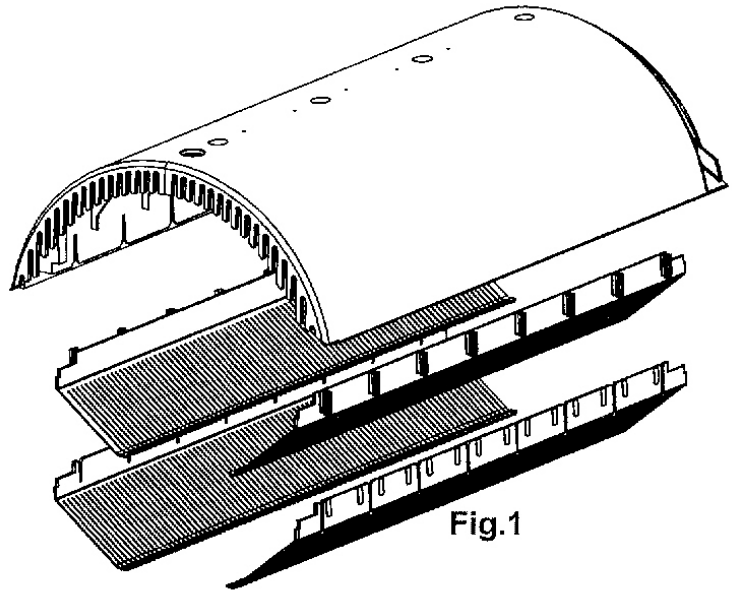


Fig.1

### Description

The Manthorpe Dry Ridge Tile System is designed to replace the more traditional Clay and Concrete Ridge tiles with a UPVC plastic moulded part. Being easier and faster to fit than existing systems, it is aimed at the refurbishment and new build markets. The latest addition to the Manthorpe Dry Fix product family, the Dry Ridge Tile requires no wet trade and can be easily fitted by one person using the pre drilled screw fixings. The double comb design prevents entry of wind driven rain, birds and large insects into the cavity space but still allows the 5000mm<sup>2</sup>/m ventilation into the roof space at ridge level. The textured concrete finish available in grey, dark brown and terracotta.

### Fitting

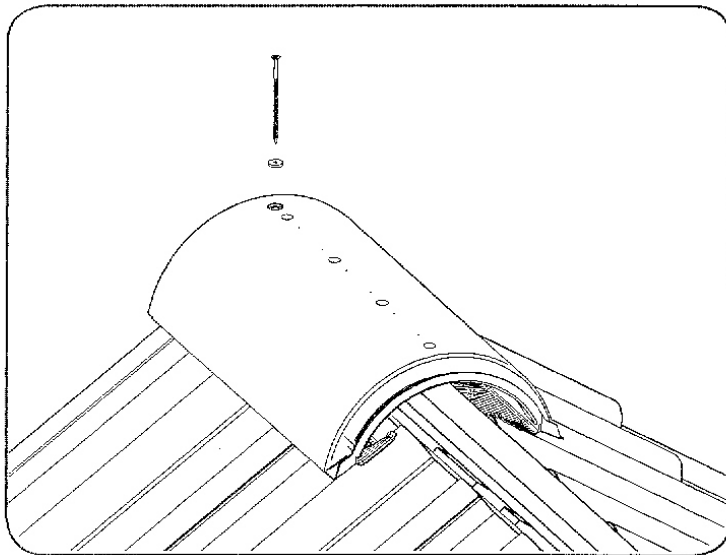


Fig.2

### References

BSI: British Standard 5534:2003  
 BSI: British Standard 6399-2:1997  
 NHBC Standards Chapter 7.2

### Specification

|                       |  |
|-----------------------|--|
| Colours - Ridge Tile  | Grey<br>Dark Brown<br>Terracotta   |
| Packing Details       | GDR-T<br>Box of 10 inc. 11 screws and washers<br>GDR-T-INC.SC<br>Box of 10 inc. 11 screws & washers & 10 GDR-SC Batten Saddle Clamps |
| Weight                | 1.148 kg   |
| Materials             | (Ridge Tile) UPVC<br>(Combs) LDPE  |
| Manufacturing process | Injection moulded  |

MANTHORPE BUILDING PRODUCTS LTD  
 MANTHORPE HOUSE  
 BRITAIN DRIVE  
 CODNOR GATE BUSINESS PARK  
 RIPLEY  
 DERBYSHIRE DE5 3ND

TEL: 01773 514 200  
 FAX: 01773 514 262  
 EMAIL: sales@manthorpe.co.uk  
 WEB: www.manthorpe.co.uk

DRN B.H.

Date 31/03/08

The company maintains a policy of continuous development of its product range and reserves the right to amend the specification without notice.

DRG No

**MBP 8272**  
 PAGE (1 OF 2)

Issue

**A**